


單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
AS-001	0.74	2.78	1.02
AS-002	1.07	3.61	1.27
AS-003	1.42	4.48	1.53
AS-004	1.78	5.34	1.78
AS-005	2.57	6.13	1.78
AS-006	2.90	6.46	1.78
AS-007	3.69	7.25	1.78
AS-008	4.47	8.03	1.78
AS-009	5.29	8.85	1.78
AS-010	6.07	9.63	1.78
AS-011	7.65	11.21	1.78
AS-012	9.25	12.81	1.78
AS-013	10.82	14.38	1.78
AS-014	12.42	15.98	1.78
AS-015	14.00	17.56	1.78
AS-016	15.60	19.16	1.78
AS-017	17.17	20.73	1.78
AS-018	18.77	22.33	1.78
AS-019	20.35	23.91	1.78
AS-020	21.95	25.51	1.78
AS-021	23.52	27.08	1.78
AS-022	25.12	28.68	1.78
AS-023	26.70	30.26	1.78
AS-024	28.30	31.86	1.78
AS-025	29.87	33.43	1.78
AS-026	31.47	35.03	1.78
AS-027	33.05	36.61	1.78
AS-028	34.65	38.21	1.78
AS-029	37.82	41.38	1.78
AS-030	41.00	44.56	1.78


規格	ID(內徑)	OD(外徑)	CS(線徑)
AS-031	44.17	47.73	1.78
AS-032	47.35	50.91	1.78
AS-033	50.52	54.08	1.78
AS-034	53.70	57.26	1.78
AS-035	56.87	60.43	1.78
AS-036	60.04	63.60	1.78
AS-037	63.22	66.78	1.78
AS-038	66.40	69.96	1.78
AS-039	69.57	73.13	1.78
AS-040	72.75	76.31	1.78
AS-041	75.92	79.48	1.78
AS-042	82.27	85.83	1.78
AS-043	88.62	92.18	1.78
AS-044	94.97	98.53	1.78
AS-045	101.32	104.88	1.78
AS-046	107.67	111.23	1.78
AS-047	114.02	117.58	1.78
AS-048	120.37	123.93	1.78
AS-049	126.72	130.28	1.78
AS-050	133.07	136.63	1.78
AS-102	1.24	6.48	2.62
AS-103	2.05	7.29	2.62
AS-104	2.84	8.08	2.62
AS-105	3.63	8.87	2.62
AS-106	4.42	9.66	2.62
AS-107	5.23	10.47	2.62
AS-108	6.02	11.26	2.62
AS-109	7.60	12.84	2.62
AS-110	9.19	14.43	2.62
AS-111	10.77	16.01	2.62

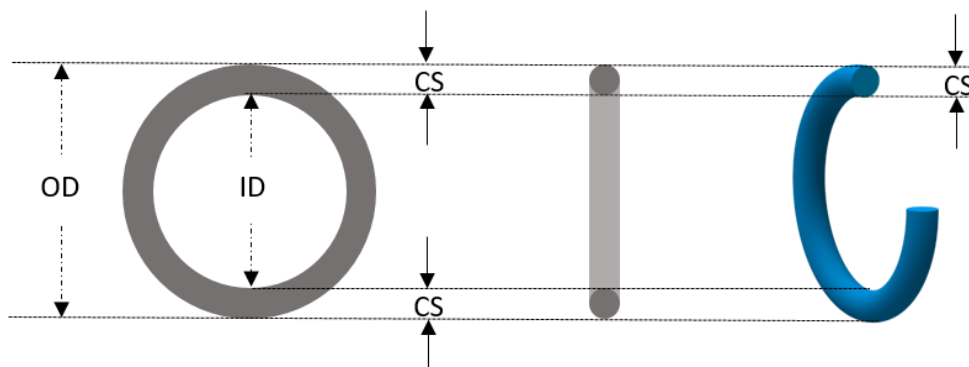

單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
AS-112	12.37	17.61	2.62
AS-113	13.95	19.19	2.62
AS-114	15.54	20.78	2.62
AS-115	17.12	22.36	2.62
AS-116	18.72	23.96	2.62
AS-117	20.29	25.53	2.62
AS-118	21.90	27.14	2.62
AS-119	23.47	28.71	2.62
AS-120	25.07	30.31	2.62
AS-121	26.65	31.89	2.62
AS-122	28.25	33.49	2.62
AS-123	29.82	35.06	2.62
AS-124	31.42	36.66	2.62
AS-125	32.99	38.23	2.62
AS-126	34.60	39.84	2.62
AS-127	36.17	41.41	2.62
AS-128	37.77	43.01	2.62
AS-129	39.35	44.59	2.62
AS-130	40.95	46.19	2.62
AS-131	42.52	47.76	2.62
AS-132	44.12	49.36	2.62
AS-133	45.70	50.94	2.62
AS-134	47.30	52.54	2.62
AS-135	48.90	54.14	2.62
AS-136	50.47	55.71	2.62
AS-137	52.07	57.31	2.62
AS-138	53.65	58.89	2.62
AS-139	55.25	60.49	2.62
AS-140	56.82	62.06	2.62
AS-141	58.42	63.66	2.62


規格	ID(內徑)	OD(外徑)	CS(線徑)
AS-142	60.00	65.24	2.62
AS-143	61.60	66.84	2.62
AS-144	63.17	68.41	2.62
AS-145	64.77	70.01	2.62
AS-146	66.35	71.59	2.62
AS-147	67.95	73.19	2.62
AS-148	69.52	74.76	2.62
AS-149	71.12	76.36	2.62
AS-150	72.70	77.94	2.62
AS-151	75.87	81.11	2.62
AS-152	82.22	87.46	2.62
AS-153	88.57	93.81	2.62
AS-154	94.92	100.16	2.62
AS-155	101.27	106.51	2.62
AS-156	107.62	112.86	2.62
AS-157	113.97	119.21	2.62
AS-158	120.32	125.56	2.62
AS-159	126.67	131.91	2.62
AS-160	133.02	138.26	2.62
AS-161	139.37	144.61	2.62
AS-162	145.72	150.96	2.62
AS-163	152.07	157.31	2.62
AS-164	158.42	163.66	2.62
AS-165	164.77	170.01	2.62
AS-166	171.12	176.36	2.62
AS-167	177.47	182.71	2.62
AS-168	183.82	189.06	2.62
AS-169	190.17	195.41	2.62
AS-170	196.52	201.76	2.62
AS-171	202.87	208.11	2.62

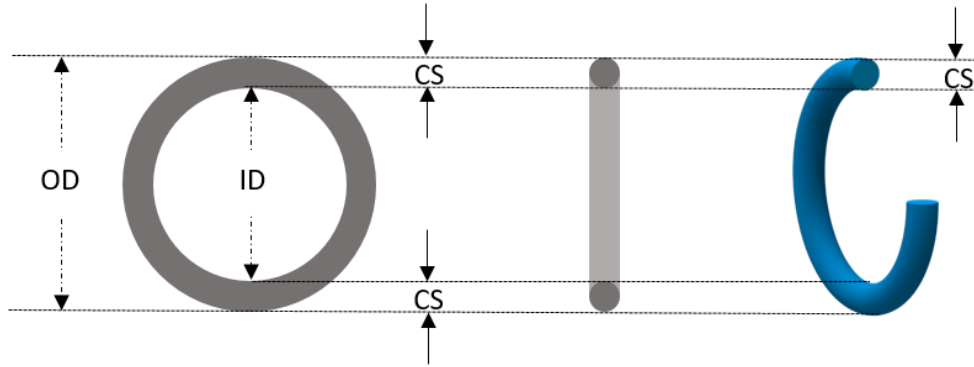

單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
AS-172	209.22	214.46	2.62
AS-173	215.57	220.81	2.62
AS-174	221.92	227.16	2.62
AS-175	228.27	233.51	2.62
AS-176	234.62	239.86	2.62
AS-177	240.97	246.21	2.62
AS-178	247.32	252.56	2.62
AS-201	4.34	11.40	3.53
AS-202	5.94	13.00	3.53
AS-203	7.52	14.58	3.53
AS-204	9.12	16.18	3.53
AS-205	10.69	17.75	3.53
AS-206	12.29	19.35	3.53
AS-207	13.87	20.93	3.53
AS-208	15.47	22.53	3.53
AS-209	17.04	24.10	3.53
AS-210	18.64	25.70	3.53
AS-211	20.22	27.28	3.53
AS-212	21.82	28.88	3.53
AS-213	23.40	30.46	3.53
AS-214	25.00	32.06	3.53
AS-215	26.57	33.63	3.53
AS-216	28.17	35.23	3.53
AS-217	29.75	36.81	3.53
AS-218	31.34	38.40	3.53
AS-219	32.92	39.98	3.53
AS-220	34.52	41.58	3.53
AS-221	36.10	43.16	3.53
AS-222	37.70	44.76	3.53
AS-223	40.87	47.93	3.53


規格	ID(內徑)	OD(外徑)	CS(線徑)
AS-224	44.05	51.11	3.53
AS-225	47.22	54.28	3.53
AS-226	50.40	57.46	3.53
AS-227	53.57	60.63	3.53
AS-228	56.75	63.81	3.53
AS-229	59.92	66.98	3.53
AS-230	63.10	70.16	3.53
AS-231	66.27	73.33	3.53
AS-232	69.44	76.50	3.53
AS-233	72.62	79.68	3.53
AS-234	75.79	82.85	3.53
AS-235	78.97	86.03	3.53
AS-236	82.14	89.20	3.53
AS-237	85.32	92.38	3.53
AS-238	88.49	95.55	3.53
AS-239	91.67	98.73	3.53
AS-240	94.84	101.90	3.53
AS-241	98.02	105.08	3.53
AS-242	101.19	108.25	3.53
AS-243	104.37	111.43	3.53
AS-244	107.54	114.60	3.53
AS-245	110.72	117.78	3.53
AS-246	113.89	120.95	3.53
AS-247	117.07	124.13	3.53
AS-248	120.24	127.30	3.53
AS-249	123.42	130.48	3.53
AS-250	126.59	133.65	3.53
AS-251	129.77	136.83	3.53
AS-252	132.94	140.00	3.53
AS-253	136.12	143.18	3.53

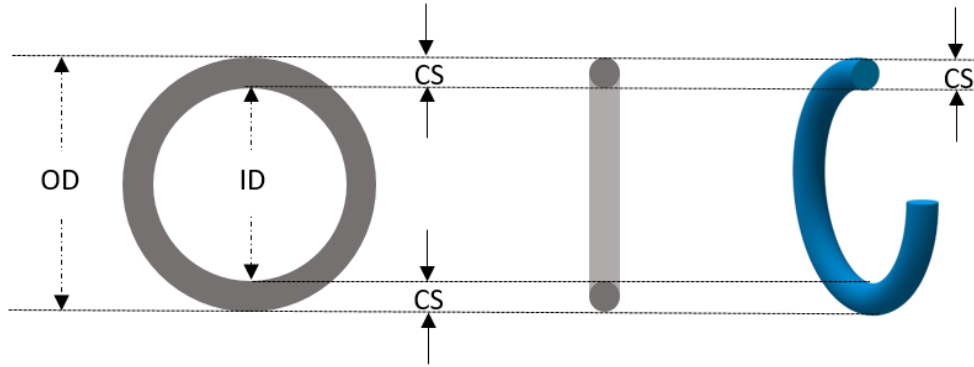

單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
AS-254	139.30	146.36	3.53
AS-255	142.47	149.53	3.53
AS-256	145.65	152.71	3.53
AS-257	148.82	155.88	3.53
AS-258	152.00	159.06	3.53
AS-259	158.35	165.41	3.53
AS-260	164.70	171.76	3.53
AS-261	171.05	178.11	3.53
AS-262	177.40	184.46	3.53
AS-263	183.75	190.81	3.53
AS-264	190.10	197.16	3.53
AS-265	196.45	203.51	3.53
AS-266	202.80	209.86	3.53
AS-267	209.15	216.21	3.53
AS-268	215.50	222.56	3.53
AS-269	221.85	228.91	3.53
AS-270	228.20	235.26	3.53
AS-271	234.55	241.61	3.53
AS-272	240.90	247.96	3.53
AS-273	247.25	254.31	3.53
AS-274	253.60	260.66	3.53
AS-275	266.30	273.36	3.53
AS-276	279.00	286.06	3.53
AS-277	291.70	298.76	3.53
AS-278	304.40	311.46	3.53
AS-279	329.80	336.86	3.53
AS-280	355.20	362.26	3.53
AS-281	380.60	387.66	3.53
AS-282	405.26	412.32	3.53
AS-283	430.66	437.72	3.53


規格	ID(內徑)	OD(外徑)	CS(線徑)
AS-284	456.06	463.12	3.53
AS-309	10.46	21.12	5.33
AS-310	12.07	22.73	5.33
AS-311	13.64	24.30	5.33
AS-312	15.24	25.90	5.33
AS-313	16.81	27.47	5.33
AS-314	18.42	29.08	5.33
AS-315	19.99	30.65	5.33
AS-316	21.59	32.25	5.33
AS-317	23.16	33.82	5.33
AS-318	24.77	35.43	5.33
AS-319	26.34	37.00	5.33
AS-320	27.94	38.60	5.33
AS-321	29.51	40.17	5.33
AS-322	31.12	41.78	5.33
AS-323	32.69	43.35	5.33
AS-324	34.29	44.95	5.33
AS-325	37.47	48.13	5.33
AS-326	40.65	51.31	5.33
AS-327	43.82	54.48	5.33
AS-328	46.99	57.65	5.33
AS-329	50.16	60.82	5.33
AS-330	53.34	64.00	5.33
AS-331	56.52	67.18	5.33
AS-332	59.69	70.35	5.33
AS-333	62.87	73.53	5.33
AS-334	66.04	76.70	5.33
AS-335	69.22	79.88	5.33
AS-336	72.39	83.05	5.33
AS-337	75.57	86.23	5.33

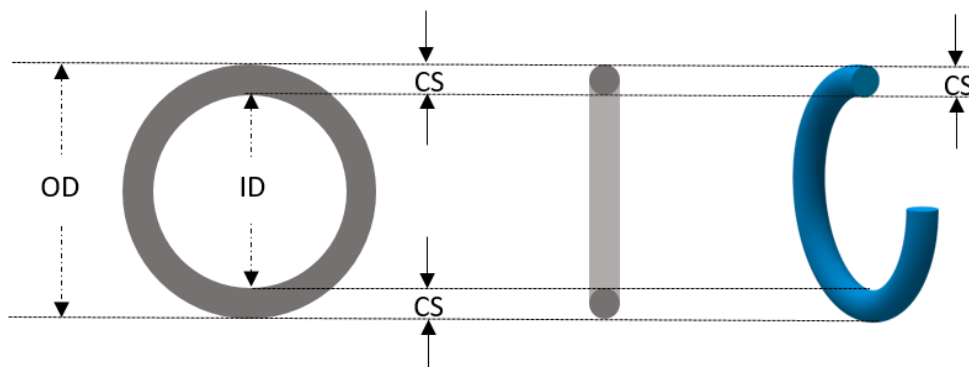

單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
AS-338	78.74	89.40	5.33
AS-339	81.92	92.58	5.33
AS-340	85.09	95.75	5.33
AS-341	88.27	98.93	5.33
AS-342	91.44	102.10	5.33
AS-343	94.62	105.28	5.33
AS-344	97.79	108.45	5.33
AS-345	100.96	111.62	5.33
AS-346	104.14	114.80	5.33
AS-347	107.32	117.98	5.33
AS-348	110.49	121.15	5.33
AS-349	113.67	124.33	5.33
AS-350	116.84	127.50	5.33
AS-351	120.02	130.68	5.33
AS-352	123.19	133.85	5.33
AS-353	126.37	137.03	5.33
AS-354	129.54	140.20	5.33
AS-355	132.72	143.38	5.33
AS-356	135.89	146.55	5.33
AS-357	139.07	149.73	5.33
AS-358	142.24	152.90	5.33
AS-359	145.42	156.08	5.33
AS-360	148.59	159.25	5.33
AS-361	151.77	162.43	5.33
AS-362	158.12	168.78	5.33
AS-363	164.47	175.13	5.33
AS-364	170.82	181.48	5.33
AS-365	177.17	187.83	5.33
AS-366	183.52	194.18	5.33
AS-367	189.87	200.53	5.33


規格	ID(內徑)	OD(外徑)	CS(線徑)
AS-368	196.22	206.88	5.33
AS-369	202.57	213.23	5.33
AS-370	208.92	219.58	5.33
AS-371	215.27	225.93	5.33
AS-372	221.62	232.28	5.33
AS-373	227.97	238.63	5.33
AS-374	234.32	244.98	5.33
AS-375	240.67	251.33	5.33
AS-376	247.02	257.68	5.33
AS-377	253.37	264.03	5.33
AS-378	266.07	276.73	5.33
AS-379	278.77	289.43	5.33
AS-380	291.47	302.13	5.33
AS-381	304.17	314.83	5.33
AS-382	329.57	340.23	5.33
AS-383	354.97	365.63	5.33
AS-384	380.37	391.03	5.33
AS-385	405.26	415.92	5.33
AS-386	430.65	441.31	5.33
AS-387	456.06	466.72	5.33
AS-388	481.46	492.12	5.33
AS-389	506.86	517.52	5.33
AS-390	532.26	542.92	5.33
AS-391	557.66	568.32	5.33
AS-392	582.65	593.31	5.33
AS-393	608.10	618.76	5.33
AS-394	633.50	644.16	5.33
AS-395	658.85	669.51	5.33
AS-425	113.67	127.65	6.99
AS-426	116.84	130.82	6.99

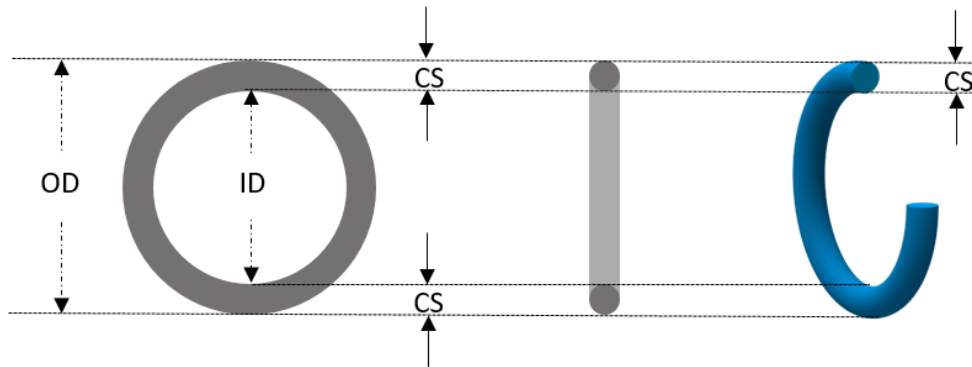

單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
AS-427	120.02	134.00	6.99
AS-428	123.19	137.17	6.99
AS-429	126.37	140.35	6.99
AS-430	129.54	143.52	6.99
AS-431	132.72	146.70	6.99
AS-432	135.89	149.87	6.99
AS-433	139.07	153.05	6.99
AS-434	142.24	156.22	6.99
AS-435	145.42	159.40	6.99
AS-436	148.59	162.57	6.99
AS-437	151.77	165.75	6.99
AS-438	158.12	172.10	6.99
AS-439	164.47	178.45	6.99
AS-440	170.82	184.80	6.99
AS-441	177.17	191.15	6.99
AS-442	183.52	197.50	6.99
AS-443	189.87	203.85	6.99
AS-444	196.22	210.20	6.99
AS-445	202.57	216.55	6.99
AS-446	215.27	229.25	6.99
AS-447	227.97	241.95	6.99
AS-448	240.67	254.65	6.99
AS-449	253.37	267.35	6.99
AS-450	266.07	280.05	6.99
AS-451	278.77	292.75	6.99
AS-452	291.47	305.45	6.99
AS-453	304.17	318.15	6.99
AS-454	316.87	330.85	6.99
AS-455	329.57	343.55	6.99
AS-456	342.27	356.25	6.99


規格	ID(內徑)	OD(外徑)	CS(線徑)
AS-457	354.97	368.95	6.99
AS-458	367.67	381.65	6.99
AS-459	380.37	394.35	6.99
AS-460	393.07	407.05	6.99
AS-461	405.26	419.24	6.99
AS-462	417.96	431.94	6.99
AS-463	430.66	444.64	6.99
AS-464	443.36	457.34	6.99
AS-465	456.06	470.04	6.99
AS-466	468.76	482.74	6.99
AS-467	481.46	495.44	6.99
AS-468	494.16	508.14	6.99
AS-469	506.86	520.84	6.99
AS-470	532.26	546.24	6.99
AS-471	557.66	571.64	6.99
AS-472	582.65	596.63	6.99
AS-473	608.10	622.08	6.99
AS-474	633.50	647.48	6.99
AS-475	658.85	672.83	6.99
AS-901	4.70	7.54	1.42
AS-902	6.07	9.33	1.63
AS-903	7.65	10.91	1.63
AS-904	8.92	12.58	1.83
AS-905	10.52	14.18	1.83
AS-906	11.89	15.85	1.98
AS-907	13.46	17.62	2.08
AS-908	16.36	20.78	2.21
AS-909	17.94	22.86	2.46
AS-910	19.18	24.10	2.46
AS-911	21.92	27.82	2.95

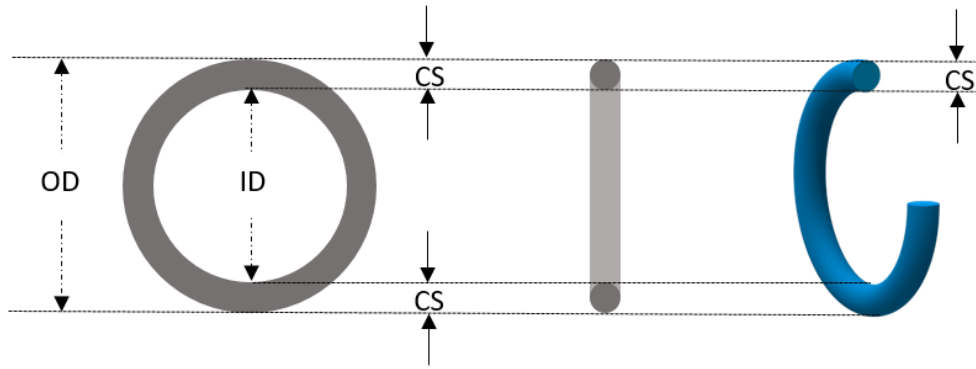

單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
AS-912	23.47	29.37	2.95
AS-913	25.04	30.94	2.95
AS-914	26.60	32.50	2.95
AS-916	29.75	35.65	2.95
AS-918	34.42	40.32	2.95
AS-920	37.46	43.46	3.00
AS-924	43.68	49.68	3.00
AS-928	53.09	59.09	3.00
AS-932	59.36	65.36	3.00

JIS B 2401-P 系列 O-RING 規格表

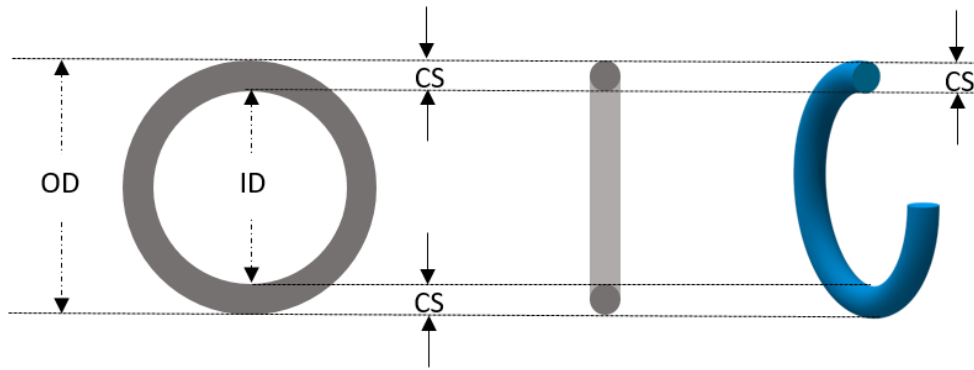


單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
P2	1.8	5.6	1.9
P3	2.8	6.6	1.9
P4	3.8	7.6	1.9
P5	4.8	8.6	1.9
P6	5.8	9.6	1.9
P7	6.8	10.6	1.9
P8	7.8	11.6	1.9
P9	8.8	12.6	1.9
P10	9.8	13.6	1.9
P10A	9.8	14.6	2.4
P11	10.8	15.6	2.4
P11.2	11.0	15.8	2.4
P12	11.8	16.6	2.4
P12.5	12.3	17.1	2.4
P14	13.8	18.6	2.4
P15	14.8	19.6	2.4
P16	15.8	20.6	2.4
P17	16.8	21.6	2.4
P18	17.8	22.6	2.4
P19	18.8	23.6	2.4
P20	19.8	24.6	2.4
P21	20.8	25.6	2.4
P22	21.8	26.6	2.4
P22A	21.7	28.7	3.5
P22.4	22.1	29.1	3.5
P24	23.7	30.7	3.5
P25	24.7	31.7	3.5
P25.5	25.2	32.2	3.5
P26	25.7	32.7	3.5
P28	27.7	34.7	3.5

規格	ID(內徑)	OD(外徑)	CS(線徑)
P29	28.7	35.7	3.5
P29.5	29.2	36.2	3.5
P30	29.7	36.7	3.5
P31	30.7	37.7	3.5
P31.5	31.2	38.2	3.5
P32	31.7	38.7	3.5
P34	33.7	40.7	3.5
P35	34.7	41.7	3.5
P35.5	35.2	42.2	3.5
P36	35.7	42.7	3.5
P38	37.7	44.7	3.5
P39	38.7	45.7	3.5
P40	39.7	46.7	3.5
P41	40.7	47.7	3.5
P42	41.7	48.7	3.5
P44	43.7	50.7	3.5
P45	44.7	51.7	3.5
P46	45.7	52.7	3.5
P48	47.7	54.7	3.5
P48A	47.6	59	5.7
P49	48.7	55.7	3.5
P50	49.7	56.7	3.5
P50A	49.6	61	5.7
P52	51.6	63	5.7
P53	52.6	64	5.7
P55	54.6	66	5.7
P56	55.6	67	5.7
P58	57.6	69	5.7
P60	59.6	71	5.7
P62	61.6	73	5.7

JIS B 2401-P 系列 O-RING 規格表

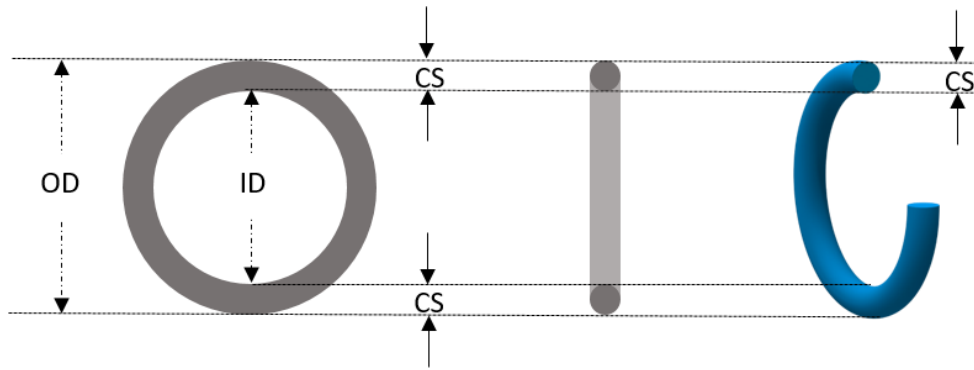


單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
P63	62.6	74	5.7
P65	64.6	76	5.7
P67	66.6	78	5.7
P70	69.6	81	5.7
P71	70.6	82	5.7
P75	74.6	86	5.7
P80	79.6	91	5.7
P85	84.6	96	5.7
P90	89.6	101	5.7
P95	94.6	106	5.7
P100	99.6	111	5.7
P102	101.6	113	5.7
P105	104.6	116	5.7
P110	109.6	121	5.7
P112	111.6	123	5.7
P115	114.6	126	5.7
P120	119.6	131	5.7
P125	124.6	136	5.7
P130	129.6	141	5.7
P132	131.6	143	5.7
P135	134.6	146	5.7
P140	139.6	151	5.7
P145	144.6	156	5.7
P150	149.6	161	5.7
P150A	149.5	166.3	8.4
P155	154.5	171.3	8.4
P160	159.5	176.3	8.4
P165	164.5	181.3	8.4
P170	169.5	186.3	8.4
P175	174.5	191.3	8.4

規格	ID(內徑)	OD(外徑)	CS(線徑)
P180	179.5	196.3	8.4
P185	184.5	201.3	8.4
P190	189.5	206.3	8.4
P195	194.5	211.3	8.4
P200	199.5	216.3	8.4
P205	204.5	221.3	8.4
P209	208.5	225.3	8.4
P210	209.5	226.3	8.4
P215	214.5	231.3	8.4
P220	219.5	236.3	8.4
P225	224.5	241.3	8.4
P230	229.5	246.3	8.4
P235	234.5	251.3	8.4
P240	239.5	256.3	8.4
P245	244.5	261.3	8.4
P250	249.5	266.3	8.4
P255	254.5	271.3	8.4
P260	259.5	276.3	8.4
P265	264.5	281.3	8.4
P270	269.5	286.3	8.4
P275	274.5	291.3	8.4
P280	279.5	296.3	8.4
P285	284.5	301.3	8.4
P290	289.5	306.3	8.4
P295	294.5	311.3	8.4
P300	299.5	316.3	8.4
P305	304.5	321.3	8.4
P310	309.5	326.3	8.4
P315	314.5	331.3	8.4
P320	319.5	336.3	8.4

JIS B 2401-P 系列 O-RING 規格表

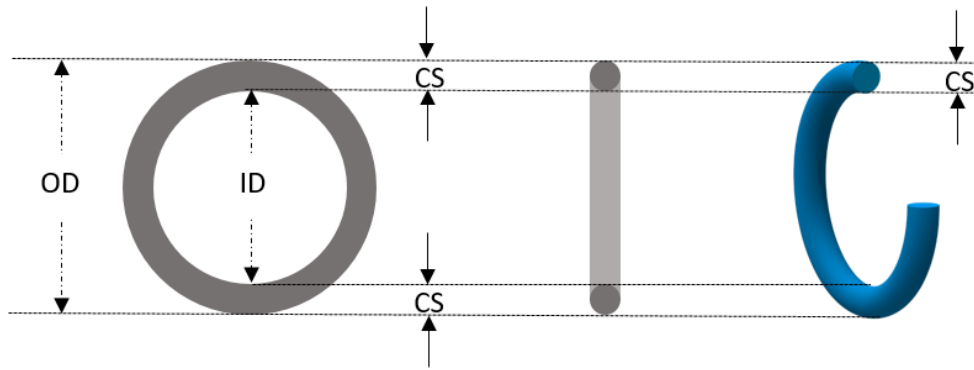


單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
P325	324.5	341.3	8.4
P330	329.5	346.3	8.4
P335	334.5	351.3	8.4
P340	339.5	356.3	8.4
P345	344.5	361.3	8.4
P350	349.5	366.3	8.4
P355	354.5	371.3	8.4
P360	359.5	376.3	8.4
P365	364.5	381.3	8.4
P370	369.5	386.3	8.4
P375	374.5	391.3	8.4
P380	379.5	396.3	8.4
P385	384.5	401.3	8.4
P390	389.5	406.3	8.4
P395	394.5	411.3	8.4
P400	399.5	416.3	8.4
P405	404.5	421.3	8.4
P410	409.5	426.3	8.4
P415	414.5	431.3	8.4
P420	419.5	436.3	8.4
P425	424.5	441.3	8.4
P430	429.5	446.3	8.4
P435	434.5	451.3	8.4
P440	439.5	456.3	8.4
P445	444.5	461.3	8.4
P450	449.5	466.3	8.4
P455	454.5	471.3	8.4
P460	459.5	476.3	8.4
P465	464.5	481.3	8.4
P470	469.5	486.3	8.4

規格	ID(內徑)	OD(外徑)	CS(線徑)
P475	474.5	491.3	8.4
P480	479.5	496.3	8.4
P485	484.5	501.3	8.4
P490	489.5	506.3	8.4
P495	494.5	511.3	8.4
P500	499.5	516.3	8.4
P505	504.5	521.3	8.4
P510	509.5	526.3	8.4
P515	514.5	531.3	8.4
P520	519.5	536.3	8.4
P525	524.5	541.3	8.4
P530	529.5	546.3	8.4
P535	534.5	551.3	8.4
P540	539.5	556.3	8.4
P545	544.5	561.3	8.4
P550	549.5	566.3	8.4
P555	554.5	571.3	8.4
P560	559.5	576.3	8.4
P565	564.5	581.3	8.4
P570	569.5	586.3	8.4
P575	574.5	591.3	8.4
P580	579.5	596.3	8.4
P585	584.5	601.3	8.4
P590	589.5	606.3	8.4
P595	594.5	611.3	8.4
P600	599.5	616.3	8.4
P610	609.5	626.3	8.4
P620	619.5	636.3	8.4
P630	629.5	646.3	8.4
P640	639.5	656.3	8.4

JIS B 2401-P 系列 O-RING 規格表

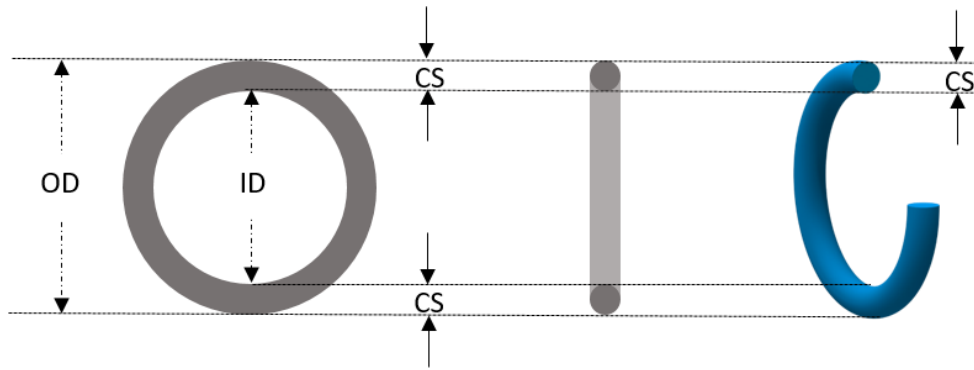


單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
P650	649.5	666.3	8.4
P660	659.5	676.3	8.4
P670	669.5	686.3	8.4
P680	679.5	696.3	8.4
P690	689.5	706.3	8.4
P700	699.5	716.3	8.4
P710	709.5	726.3	8.4
P720	719.5	736.3	8.4
P730	729.5	746.3	8.4
P740	739.5	756.3	8.4
P750	749.5	766.3	8.4
P760	759.5	776.3	8.4
P770	769.5	786.3	8.4
P780	779.5	796.3	8.4
P790	789.5	806.3	8.4
P800	799.5	816.3	8.4
P810	809.5	826.3	8.4
P820	819.5	836.3	8.4
P830	829.5	846.3	8.4
P840	839.5	856.3	8.4
P850	849.5	866.3	8.4
P860	859.5	876.3	8.4
P870	869.5	886.3	8.4
P880	879.5	896.3	8.4
P890	889.5	906.3	8.4
P900	899.5	916.3	8.4
P910	909.5	926.3	8.4
P920	919.5	936.3	8.4
P930	929.5	946.3	8.4
P940	939.5	956.3	8.4

規格	ID(內徑)	OD(外徑)	CS(線徑)
P950	949.5	966.3	8.4
P960	959.5	976.3	8.4
P970	969.5	986.3	8.4
P980	979.5	996.3	8.4
P990	989.5	1006.3	8.4
P1000	999.5	1016.3	8.4

JIS B 2401-G 系列 O-RING 規格表

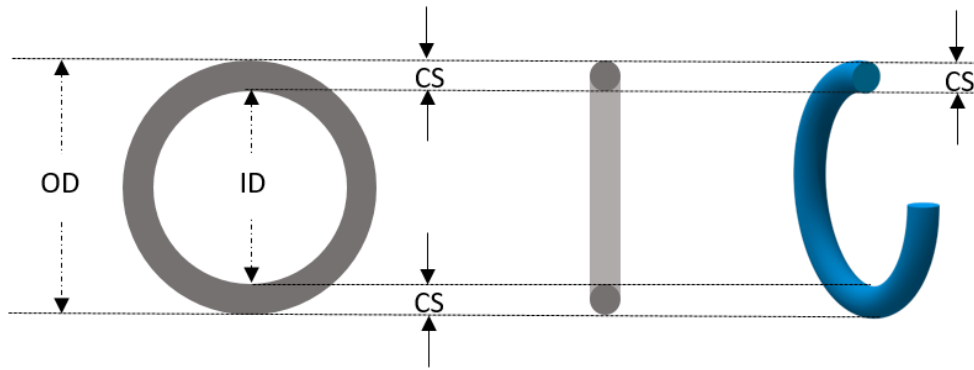


單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
G25	24.4	30.6	3.1
G30	29.4	35.6	3.1
G35	34.4	40.6	3.1
G40	39.4	45.6	3.1
G45	44.4	50.6	3.1
G50	49.4	55.6	3.1
G55	54.4	60.6	3.1
G58	57.4	63.6	3.1
G60	59.4	65.6	3.1
G65	64.4	70.6	3.1
G70	69.4	75.6	3.1
G75	74.4	80.6	3.1
G80	79.4	85.6	3.1
G85	84.4	90.6	3.1
G90	89.4	95.6	3.1
G95	94.4	100.6	3.1
G100	99.4	105.6	3.1
G105	104.4	110.6	3.1
G110	109.4	115.6	3.1
G115	114.4	120.6	3.1
G120	119.4	125.6	3.1
G125	124.4	130.6	3.1
G130	129.4	135.6	3.1
G135	134.4	140.6	3.1
G140	139.4	145.6	3.1
G145	144.4	150.6	3.1
G150	149.3	160.7	5.7
G155	154.3	165.7	5.7
G160	159.3	170.7	5.7
G165	164.3	175.7	5.7

規格	ID(內徑)	OD(外徑)	CS(線徑)
G170	169.3	180.7	5.7
G175	174.3	185.7	5.7
G180	179.3	190.7	5.7
G185	184.3	195.7	5.7
G190	189.3	200.7	5.7
G195	194.3	205.7	5.7
G200	199.3	210.7	5.7
G205	204.3	215.7	5.7
G210	209.3	220.7	5.7
G215	214.3	225.7	5.7
G220	219.3	230.7	5.7
G225	224.3	235.7	5.7
G230	229.3	240.7	5.7
G235	234.3	245.7	5.7
G240	239.3	250.7	5.7
G245	244.3	255.7	5.7
G250	249.3	260.7	5.7
G255	254.3	265.7	5.7
G260	259.3	270.7	5.7
G265	264.3	275.7	5.7
G270	269.3	280.7	5.7
G275	274.3	285.7	5.7
G280	279.3	290.7	5.7
G285	284.3	295.7	5.7
G290	289.3	300.7	5.7
G295	294.3	305.7	5.7
G300	299.3	310.7	5.7
G305	304.3	315.7	5.7
G310	309.3	320.7	5.7
G315	314.3	325.7	5.7

JIS B 2401-G 系列 O-RING 規格表

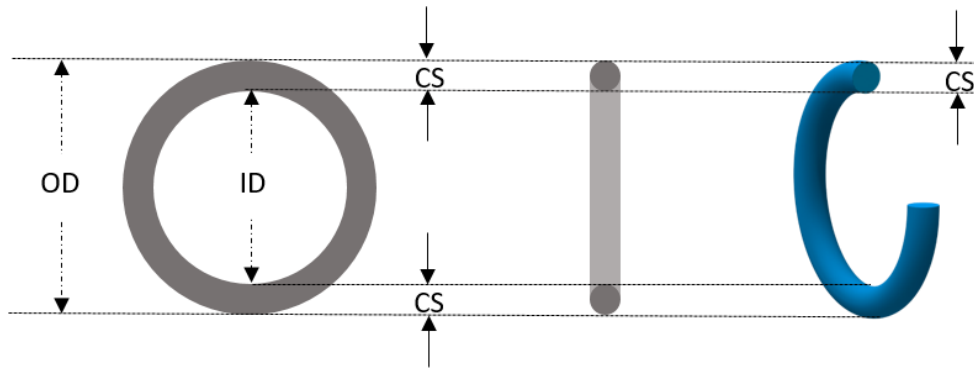


單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
G320	319.3	330.7	5.7
G325	324.3	335.7	5.7
G330	329.3	340.7	5.7
G335	334.3	345.7	5.7
G340	339.3	350.7	5.7
G345	344.3	355.7	5.7
G350	349.3	360.7	5.7
G355	354.3	365.7	5.7
G360	359.3	370.7	5.7
G365	364.3	375.7	5.7
G370	369.3	380.7	5.7
G375	374.3	385.7	5.7
G380	379.3	390.7	5.7
G385	384.3	395.7	5.7
G390	389.3	400.7	5.7
G395	394.3	405.7	5.7
G400	399.3	410.7	5.7
G405	404.3	415.7	5.7
G410	409.3	420.7	5.7
G415	414.3	425.7	5.7
G420	419.3	430.7	5.7
G425	424.3	435.7	5.7
G430	429.3	440.7	5.7
G435	434.3	445.7	5.7
G440	439.3	450.7	5.7
G445	444.3	455.7	5.7
G450	449.3	460.7	5.7
G455	454.3	465.7	5.7
G460	459.3	470.7	5.7
G465	464.3	475.7	5.7

規格	ID(內徑)	OD(外徑)	CS(線徑)
G470	469.3	480.7	5.7
G475	474.3	485.7	5.7
G480	479.3	490.7	5.7
G485	484.3	495.7	5.7
G490	489.3	500.7	5.7
G495	494.3	505.7	5.7
G500	499.3	510.7	5.7
G505	504.3	515.7	5.7
G510	509.3	520.7	5.7
G515	514.3	525.7	5.7
G520	519.3	530.7	5.7
G525	524.3	535.7	5.7
G530	529.3	540.7	5.7
G535	534.3	545.7	5.7
G540	539.3	550.7	5.7
G545	544.3	555.7	5.7
G550	549.3	560.7	5.7
G555	554.3	565.7	5.7
G560	559.3	570.7	5.7
G565	564.3	575.7	5.7
G570	569.3	580.7	5.7
G575	574.3	585.7	5.7
G580	579.3	590.7	5.7
G585	584.3	595.7	5.7
G590	589.3	600.7	5.7
G595	594.3	605.7	5.7
G600	599.3	610.7	5.7
G610	609.3	620.7	5.7
G620	619.3	630.7	5.7
G630	629.3	640.7	5.7

JIS B 2401-G 系列 O-RING 規格表

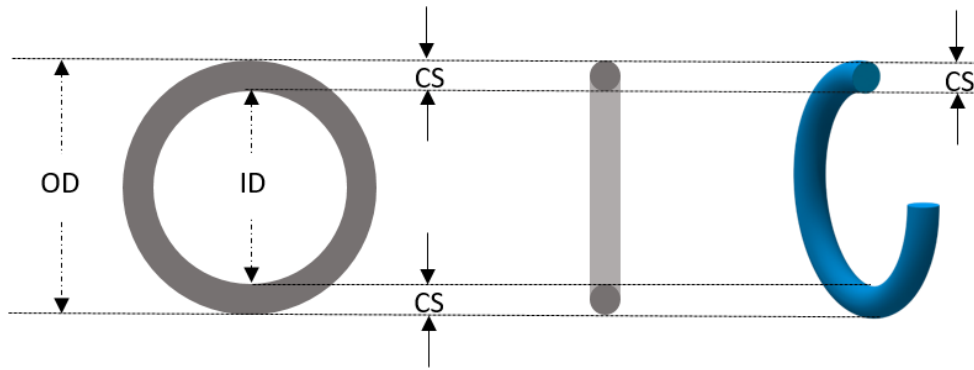


單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
G640	639.3	650.7	5.7
G650	649.3	660.7	5.7
G660	659.3	670.7	5.7
G670	669.3	680.7	5.7
G680	679.3	690.7	5.7
G690	689.3	700.7	5.7
G700	699.3	710.7	5.7
G710	709.3	720.7	5.7
G720	719.3	730.7	5.7
G730	729.3	740.7	5.7
G740	739.3	750.7	5.7
G750	749.3	760.7	5.7
G760	759.3	770.7	5.7
G770	769.3	780.7	5.7
G780	779.3	790.7	5.7
G790	789.3	800.7	5.7
G800	799.3	810.7	5.7
G810	809.3	820.7	5.7
G820	819.3	830.7	5.7
G830	829.3	840.7	5.7
G840	839.3	850.7	5.7
G850	849.3	860.7	5.7
G860	859.3	870.7	5.7
G870	869.3	880.7	5.7
G880	879.3	890.7	5.7
G890	889.3	900.7	5.7
G900	899.3	910.7	5.7
G910	909.3	920.7	5.7
G920	919.3	930.7	5.7
G930	929.3	940.7	5.7

規格	ID(內徑)	OD(外徑)	CS(線徑)
G940	939.3	950.7	5.7
G950	949.3	960.7	5.7
G960	959.3	970.7	5.7
G970	969.3	980.7	5.7
G980	979.3	990.7	5.7
G990	989.3	1000.7	5.7
G1000	999.3	1010.7	5.7

JIS B 2401-S 系列 O-RING 規格表

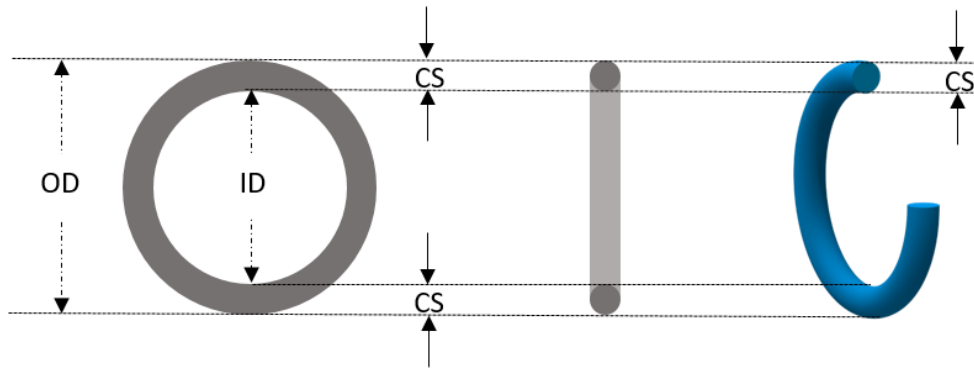


單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
S2	1.5	4.5	1.5
S3	2.5	5.5	1.5
S4	3.5	6.5	1.5
S5	4.5	7.5	1.5
S6	5.5	8.5	1.5
S7	6.5	9.5	1.5
S8	7.5	10.5	1.5
S9	8.5	11.5	1.5
S10	9.5	12.5	1.5
S11.2	10.7	13.7	1.5
S12	11.5	14.5	1.5
S12.5	12.0	15.0	1.5
S14	13.5	16.5	1.5
S15	14.5	17.5	1.5
S16	15.5	18.5	1.5
S18	17.5	20.5	1.5
S20	19.5	22.5	1.5
S22	21.5	24.5	1.5
S22.4	21.9	25.9	2.0
S24	23.5	27.5	2.0
S25	24.5	28.5	2.0
S26	25.5	29.5	2.0
S28	27.5	31.5	2.0
S29	28.5	32.5	2.0
S30	29.5	33.5	2.0
S31.5	31.0	35.0	2.0
S32	31.5	35.5	2.0
S34	33.5	37.5	2.0
S35	34.5	38.5	2.0
S35.5	35.0	39.0	2.0

規格	ID(內徑)	OD(外徑)	CS(線徑)
S36	35.5	39.5	2.0
S38	37.5	41.5	2.0
S39	38.5	42.5	2.0
S40	39.5	43.5	2.0
S42	41.5	45.5	2.0
S44	43.5	47.5	2.0
S45	44.5	48.5	2.0
S46	45.5	49.5	2.0
S48	47.5	51.5	2.0
S50	49.5	53.5	2.0
S53	52.5	56.5	2.0
S55	54.5	58.5	2.0
S56	55.5	59.5	2.0
S60	59.5	63.5	2.0
S63	62.5	66.5	2.0
S65	64.5	68.5	2.0
S67	66.5	70.5	2.0
S70	69.5	73.5	2.0
S71	70.5	74.5	2.0
S75	74.5	78.5	2.0
S80	79.5	83.5	2.0
S85	84.5	88.5	2.0
S90	89.5	93.5	2.0
S95	94.5	98.5	2.0
S100	99.5	103.5	2.0
S105	104.5	108.5	2.0
S110	109.5	113.5	2.0
S112	111.5	115.5	2.0
S115	114.5	118.5	2.0
S120	119.5	123.5	2.0

JIS B 2401-S 系列 O-RING 規格表

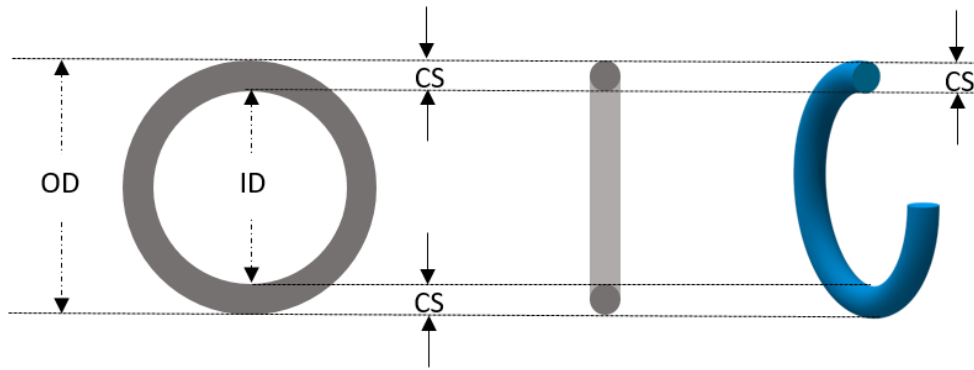


單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
S125	124.5	128.5	2.0
S130	129.5	133.5	2.0
S132	131.5	135.5	2.0
S135	134.5	138.5	2.0
S140	139.5	143.5	2.0
S145	144.5	148.5	2.0
S150	149.5	153.5	2.0
S155	154.5	158.5	2.0
S160	159.5	163.5	2.0
S165	164.5	168.5	2.0
S170	169.5	173.5	2.0
S175	174.5	178.5	2.0
S180	179.5	183.5	2.0
S185	184.5	188.5	2.0
S190	189.5	193.5	2.0
S195	194.5	198.5	2.0
S200	199.5	203.5	2.0
S205	204.5	208.5	2.0
S210	209.5	213.5	2.0
S215	214.5	218.5	2.0
S220	219.5	223.5	2.0
S225	224.5	228.5	2.0
S230	229.5	233.5	2.0
S235	234.5	238.5	2.0
S240	239.5	243.5	2.0
S245	244.5	248.5	2.0
S250	249.5	253.5	2.0
S255	254.5	258.5	2.0
S260	259.5	263.5	2.0
S265	264.5	268.5	2.0

規格	ID(內徑)	OD(外徑)	CS(線徑)
S270	269.5	273.5	2.0
S275	274.5	278.5	2.0
S280	279.5	283.5	2.0
S285	284.5	288.5	2.0
S290	289.5	293.5	2.0
S295	294.5	298.5	2.0
S300	299.5	303.5	2.0

JIS B 2401-V 系列 O-RING 規格表

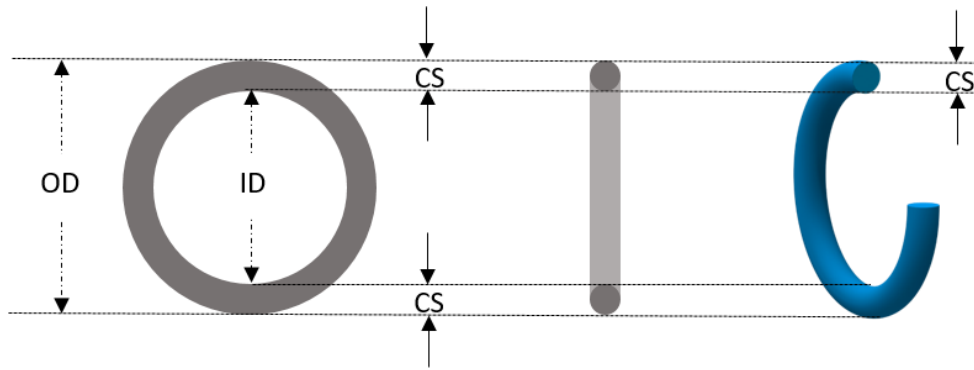


單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
V10	9.5	17.5	4.0
V11	10.5	18.5	4.0
V12	11.5	19.5	4.0
V14	13.5	21.5	4.0
V15	14.5	22.5	4.0
V16	15.5	23.5	4.0
V18	17.5	25.5	4.0
V20	19.5	27.5	4.0
V21	20.5	28.5	4.0
V22	21.5	29.5	4.0
V24	23.5	31.5	4.0
V25	24.5	32.5	4.0
V26	25.5	33.5	4.0
V28	27.5	35.5	4.0
V30	29.5	37.5	4.0
V32	31.5	39.5	4.0
V34	33.5	41.5	4.0
V35	34.5	42.5	4.0
V36	35.5	43.5	4.0
V38	37.5	45.5	4.0
V40	39.5	47.5	4.0
V42	41.5	49.5	4.0
V44	43.5	51.5	4.0
V45	44.5	52.5	4.0
V46	45.5	53.5	4.0
V48	47.5	55.5	4.0
V50	49.5	57.5	4.0
V53	52.5	60.5	4.0
V55	54.5	62.5	4.0
V56	55.5	63.5	4.0

規格	ID(內徑)	OD(外徑)	CS(線徑)
V58	57.5	65.5	4.0
V60	59.5	67.5	4.0
V63	62.5	70.5	4.0
V65	64.5	72.5	4.0
V67	66.5	74.5	4.0
V70	69.0	77.0	4.0
V75	74.0	82.0	4.0
V80	79.0	87.0	4.0
V85	84.0	92.0	4.0
V90	89.0	97.0	4.0
V95	94.0	102.0	4.0
V100	99.0	107.0	4.0
V105	104.0	112.0	4.0
V110	109.0	117.0	4.0
V115	114.0	122.0	4.0
V120	119.0	127.0	4.0
V125	124.0	132.0	4.0
V130	129.0	137.0	4.0
V135	134.0	142.0	4.0
V140	138.5	146.5	4.0
V145	143.5	151.5	4.0
V150	148.5	156.5	4.0
V155	153.0	161.0	4.0
V160	158.0	166.0	4.0
V165	163.0	171.0	4.0
V170	168.0	176.0	4.0
V175	173.0	181.0	4.0
V180	178.0	186.0	4.0
V185	183.0	191.0	4.0
V190	188.0	196.0	4.0

JIS B 2401-V 系列 O-RING 規格表

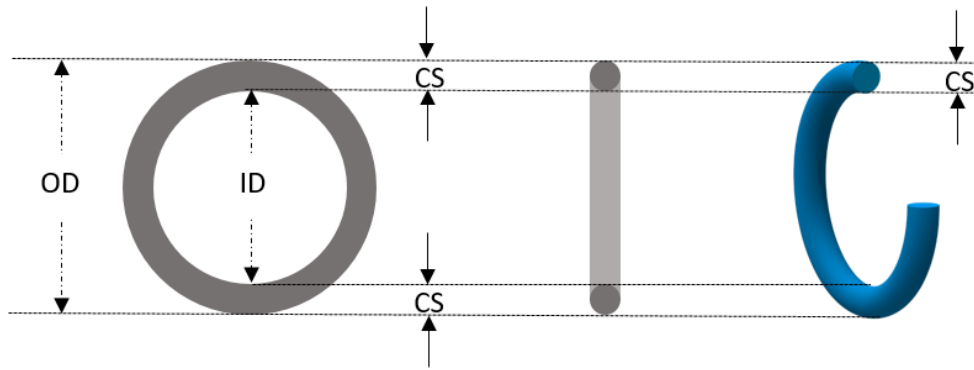


單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
V195	193.0	201.0	4.0
V200	198.0	206.0	4.0
V205	203.0	211.0	4.0
V210	208.0	216.0	4.0
V215	213.0	221.0	4.0
V220	218.0	226.0	4.0
V225	222.5	234.5	6.0
V230	227.5	239.5	6.0
V235	232.5	244.5	6.0
V240	237.5	249.5	6.0
V245	242.5	254.5	6.0
V250	247.5	259.5	6.0
V255	252.5	264.5	6.0
V260	257.5	269.5	6.0
V265	262.5	274.5	6.0
V270	267.5	279.5	6.0
V275	272.0	284.0	6.0
V280	277.0	289.0	6.0
V285	282.0	294.0	6.0
V290	287.0	299.0	6.0
V295	292.0	304.0	6.0
V300	297.0	309.0	6.0
V305	302.0	314.0	6.0
V310	307.0	319.0	6.0
V315	312.0	324.0	6.0
V320	317.0	329.0	6.0
V325	321.5	333.5	6.0
V330	326.5	338.5	6.0
V335	331.5	343.5	6.0
V340	336.5	348.5	6.0

規格	ID(內徑)	OD(外徑)	CS(線徑)
V345	341.5	353.5	6.0
V350	346.5	358.5	6.0
V355	351.5	363.5	6.0
V360	356.5	368.5	6.0
V365	361.5	373.5	6.0
V370	366.5	378.5	6.0
V375	371.5	383.5	6.0
V380	376.0	388.0	6.0
V385	381.0	393.0	6.0
V390	386.0	398.0	6.0
V395	391.0	403.0	6.0
V400	396.0	408.0	6.0
V405	401.0	413.0	6.0
V410	406.0	418.0	6.0
V415	411.0	423.0	6.0
V420	416.0	428.0	6.0
V425	421.0	433.0	6.0
V430	425.5	437.5	6.0
V440	435.5	447.5	6.0
V445	440.5	452.5	6.0
V450	445.5	457.5	6.0
V455	450.5	462.5	6.0
V460	455.5	467.5	6.0
V465	460.5	472.5	6.0
V470	465.5	477.5	6.0
V475	470.5	482.5	6.0
V480	475.0	495.0	10.0
V490	485.0	505.0	10.0
V500	494.5	514.5	10.0
V510	504.5	524.5	10.0


JIS B 2401-V 系列 O-RING 規格表

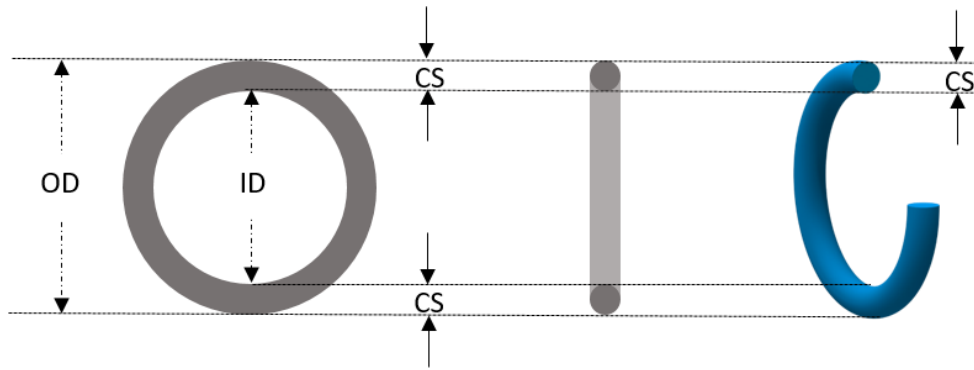

單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
V520	514.5	534.5	10.0
V530	524.5	544.5	10.0
V540	534.0	554.0	10.0
V550	544.0	564.0	10.0
V560	554.0	574.0	10.0
V570	564.0	584.0	10.0
V580	574.0	594.0	10.0
V585	579.0	599.0	10.0
V590	584.0	604.0	10.0
V600	593.0	613.0	10.0
V610	603.5	623.5	10.0
V620	613.5	633.5	10.0
V630	623.5	643.5	10.0
V640	633.5	653.5	10.0
V650	643.0	663.0	10.0
V660	653.0	673.0	10.0
V670	663.0	683.0	10.0
V680	673.0	693.0	10.0
V690	683.0	703.0	10.0
V700	692.5	712.5	10.0
V710	702.5	722.5	10.0
V720	712.5	732.5	10.0
V730	722.5	742.5	10.0
V740	732.5	752.5	10.0
V750	742.0	762.0	10.0
V760	752.0	772.0	10.0
V770	762.0	782.0	10.0
V780	772.0	792.0	10.0
V790	782.0	802.0	10.0
V800	791.5	811.5	10.0


規格	ID(內徑)	OD(外徑)	CS(線徑)
V810	801.5	821.5	10.0
V820	811.5	831.5	10.0
V830	821.5	841.5	10.0
V840	831.5	851.5	10.0
V845	836.5	856.5	10.0
V850	841.5	861.5	10.0
V860	851.5	871.5	10.0
V870	861.5	881.5	10.0
V880	871.5	891.5	10.0
V890	881.5	901.5	10.0
V900	891.0	911.5	10.0
V910	901.0	921.5	10.0
V920	911.0	931.0	10.0
V930	921.0	941.0	10.0
V940	931.0	951.0	10.0
V950	940.5	960.5	10.0
V960	950.5	970.5	10.0
V970	960.5	980.5	10.0
V980	970.2	990.2	10.0
V990	980.5	1000.5	10.0
V1000	990.5	1010.5	10.0

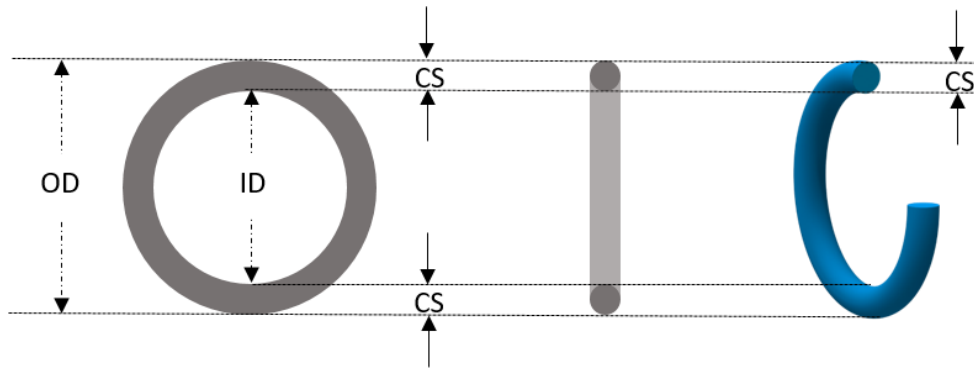

單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
JASO-1003	2.8	6.6	1.9
JASO-1004	3.8	7.6	1.9
JASO-1005	4.8	8.6	1.9
JASO-1006	5.8	9.6	1.9
JASO-1007	6.8	10.6	1.9
JASO-1008	7.8	11.6	1.9
JASO-1009	8.8	12.6	1.9
JASO-1010	9.8	13.6	1.9
JASO-1011	11.0	14.8	1.9
JASO-1012	12.3	16.1	1.9
JASO-1013	13.0	16.8	1.9
JASO-1014	13.8	17.6	1.9
JASO-1015	14.8	18.6	1.9
JASO-1016	15.8	19.6	1.9
JASO-1017	16.8	20.6	1.9
JASO-1018	17.8	21.6	1.9
JASO-1019	18.8	22.6	1.9
JASO-1020	19.8	23.6	1.9
JASO-1021	21.0	24.8	1.9
JASO-1022	22.1	25.9	1.9
JASO-1023	23.3	27.1	1.9
JASO-1025	24.7	28.5	1.9
JASO-1026	26.2	30.0	1.9
JASO-1028	27.7	31.5	1.9
JASO-1030	29.7	33.5	1.9
JASO-1031	31.2	35.0	1.9
JASO-1033	33.2	37.0	1.9
JASO-1035	35.2	39.0	1.9
JASO-2010	9.8	14.6	2.4
JASO-2011	11.0	15.8	2.4

規格	ID(內徑)	OD(外徑)	CS(線徑)
JASO-2012	12.3	17.1	2.4
JASO-2013	13.0	17.8	2.4
JASO-2014	13.8	18.6	2.4
JASO-2015	14.8	19.6	2.4
JASO-2016	15.8	20.6	2.4
JASO-2017	16.8	21.6	2.4
JASO-2018	17.8	22.6	2.4
JASO-2019	18.8	23.6	2.4
JASO-2020	19.8	24.6	2.4
JASO-2021	20.8	25.6	2.4
JASO-2022	22.1	26.9	2.4
JASO-2023	23.3	28.1	2.4
JASO-2025	24.7	29.5	2.4
JASO-2026	26.2	31.0	2.4
JASO-2028	27.7	32.5	2.4
JASO-2030	29.7	34.5	2.4
JASO-2031	31.2	36.0	2.4
JASO-2033	33.2	38.0	2.4
JASO-2035	35.2	40.0	2.4
JASO-2037	37.2	42.0	2.4
JASO-2040	39.7	44.5	2.4
JASO-2042	42.2	47.0	2.4
JASO-2045	44.7	49.5	2.4
JASO-2047	47.2	52.0	2.4
JASO-2050	49.7	54.5	2.4
JASO-2053	52.6	57.4	2.4
JASO-2056	55.6	60.4	2.4
JASO-2060	59.6	64.4	2.4
JASO-2063	62.6	67.4	2.4
JASO-2067	66.6	71.4	2.4

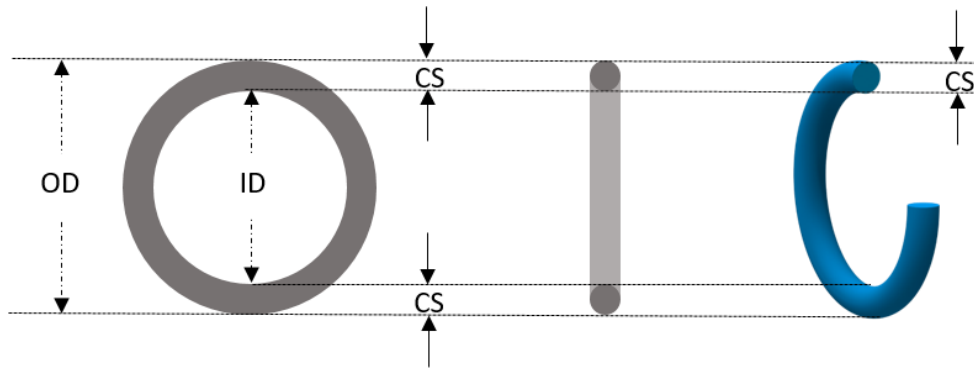


單位 unit:mm

規格	ID(內徑)	OD(外徑)	CS(線徑)
JASO-2071	70.6	75.4	2.4
JASO-3022	22.1	29.1	3.5
JASO-3024	23.7	30.7	3.5
JASO-3025	24.7	31.7	3.5
JASO-3026	25.7	32.7	3.5
JASO-3028	27.7	34.7	3.5
JASO-3030	29.7	36.7	3.5
JASO-3031	31.2	38.2	3.5
JASO-3034	33.7	40.7	3.5
JASO-3035	35.2	42.2	3.5
JASO-3038	37.7	44.7	3.5
JASO-3039	38.7	45.7	3.5
JASO-3040	39.7	46.7	3.5
JASO-3042	41.7	48.7	3.5
JASO-3044	43.7	50.7	3.5
JASO-3045	44.7	51.7	3.5
JASO-3048	47.7	54.7	3.5
JASO-3050	49.7	56.7	3.5
JASO-3053	52.6	59.6	3.5
JASO-3056	55.6	62.6	3.5
JASO-3060	59.6	66.6	3.5
JASO-3063	62.6	69.6	3.5
JASO-3067	66.6	73.6	3.5
JASO-3071	70.6	77.6	3.5
JASO-3075	74.6	81.6	3.5
JASO-3080	79.6	86.6	3.5
JASO-3085	84.6	91.6	3.5
JASO-3090	89.6	96.6	3.5
JASO-3095	94.6	101.6	3.5
JASO-3100	99.6	106.6	3.5

規格	ID(內徑)	OD(外徑)	CS(線徑)
JASO-3106	105.6	112.6	3.5
JASO-3112	111.6	118.6	3.5
JASO-3118	117.6	124.6	3.5
JASO-3125	124.6	131.6	3.5
JASO-3132	131.6	138.6	3.5
JASO-3140	139.6	146.6	3.5
JASO-3150	149.6	156.6	3.5

O-RING 公差表

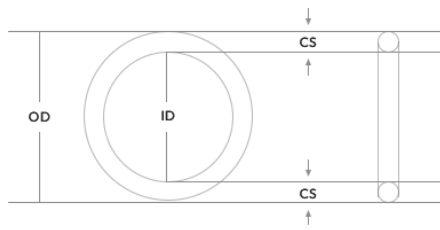

YANG SHIN

單位 unit:mm

依據:DIN3771 德國規範

內徑範圍(ID)	公差(±)
1.80-2.50	± 0.13
2.51-4.50	± 0.14
4.51-6.30	± 0.15
6.31-8.50	± 0.16
8.51-10.00	± 0.17
10.01-11.20	± 0.18
11.21-14.00	± 0.19
14.01-16.00	± 0.20
16.01-18.00	± 0.21
18.01-20.00	± 0.22
20.01-21.20	± 0.23
21.21-23.60	± 0.24
23.61-25.00	± 0.25
25.01-26.50	± 0.26
26.51-28.00	± 0.28
28.01-30.00	± 0.29
30.01-31.50	± 0.31
31.51-33.50	± 0.32
33.51-34.50	± 0.33
34.51-35.50	± 0.34
35.51-36.50	± 0.35
36.51-37.50	± 0.36
37.51-38.70	± 0.37
38.71-40.00	± 0.38
40.01-41.20	± 0.39
41.21-42.50	± 0.40
42.51-43.70	± 0.41
43.71-45.00	± 0.42
45.01-46.20	± 0.43
46.21-47.50	± 0.44
47.51-48.70	± 0.45
48.71-50.00	± 0.46
50.01-51.5	± 0.47
51.51-53.0	± 0.48
53.01-54.5	± 0.50
54.51-56.0	± 0.51


內徑範圍(ID)	公差(±)
56.01-58.0	± 0.52
58.01-60.0	± 0.54
60.01-61.5	± 0.55
61.51-63.0	± 0.56
63.01-65.0	± 0.58
65.01-67.0	± 0.59
67.01-69.0	± 0.61
69.01-71.0	± 0.63
71.01-73.0	± 0.64
73.01-75.0	± 0.66
75.01-77.5	± 0.67
77.51-80.0	± 0.69
80.01-82.5	± 0.71
82.51-85.0	± 0.73
85.01-87.5	± 0.75
87.51-90.0	± 0.77
90.01-92.5	± 0.79
92.51-95.0	± 0.81
95.01-97.5	± 0.83
97.51-100	± 0.84
100.01-103	± 0.87
103.01-106	± 0.89
106.01-109	± 0.91
109.01-112	± 0.93
112.01-115	± 0.95
115.01-118	± 0.97
118.01-122	± 1.00
122.01-125	± 1.03
125.01-128	± 1.05
128.01-132	± 1.08
132.01-136	± 1.10
136.01-140	± 1.13
140.01-145	± 1.17
145.01-150	± 1.20
150.01-155	± 1.24
155.01-160	± 1.27

內徑範圍(ID)	公差(±)
160.01-165	± 1.31
165.01-170	± 1.34
170.01-175	± 1.38
175.01-180	± 1.41
180.01-185	± 1.44
185.01-190	± 1.48
190.01-195	± 1.51
195.01-200	± 1.55
200.01-206	± 1.59
206.01-212	± 1.63
212.01-218	± 1.67
218.01-224	± 1.71
224.01-230	± 1.75
230.01-236	± 1.79
236.01-243	± 1.83
243.01-250	± 1.88
250.01-258	± 1.93
258.01-265	± 1.98
265.01-272	± 2.02
272.01-280	± 2.08
280.01-290	± 2.14
290.01-300	± 2.21
300.01-307	± 2.25
307.01-315	± 2.30
315.01-325	± 2.37
325.01-335	± 2.43
335.01-345	± 2.49
345.01-355	± 2.56
355.01-365	± 2.62
365.01-375	± 2.68
375.01-387	± 2.76
387.01-400	± 2.84
400.01-412	± 2.91
412.01-425	± 2.99
425.01-437	± 3.07
437.01-450	± 3.15

內徑範圍(ID)	公差(±)
450.01-462	± 3.22
462.01-475	± 3.30
475.01-487	± 3.37
487.01-500	± 3.45
500.01-515	± 3.54
515.01-530	± 3.63
530.01-545	± 3.72
545.01-560	± 3.81
560.01-580	± 3.93
580.01-600	± 4.05
600.01-615	± 4.13
615.01-630	± 4.22
630.01-650	± 4.34
650.01-670	± 4.46

線徑範圍(CS)	公差(±)
≤1.80	± 0.08
1.81-2.65	± 0.09
2.66-3.55	± 0.10
3.56-5.30	± 0.13
5.31-7.00	± 0.15
7.01-8.00	± 0.18
8.01-10.00	± 0.21
10.01-12.00	± 0.25

O-RING 公差表

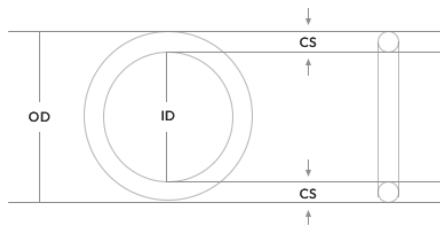

依據:ISO3601 國際規範

單位 unit:mm

內徑範圍(ID)	公差(±)
1.80 – 2.79	± 0.13
2.80 – 4.86	± 0.14
4.87 – 6.69	± 0.15
6.70 – 8.75	± 0.16
8.76 – 10.59	± 0.17
10.5 – 11.79	± 0.18
11.8 – 14.99	± 0.19
15.0 – 16.99	± 0.20
17.0 – 18.99	± 0.21
19.0 – 21.19	± 0.22
21.2 – 22.39	± 0.23
22.4 – 24.99	± 0.24
25.0 – 25.79	± 0.25
25.8 – 27.99	± 0.26
28.0 – 29.99	± 0.28
30.0 – 31.49	± 0.29
31.5 – 32.49	± 0.31
32.5 – 34.49	± 0.32
34.5 – 35.49	± 0.33
35.5 – 36.49	± 0.34
36.5 – 37.49	± 0.35
37.5 – 38.59	± 0.36
38.7 – 39.99	± 0.37
40.0 – 41.19	± 0.38
41.2 – 42.49	± 0.39
42.5 – 43.69	± 0.40
43.7 – 44.99	± 0.41
45.0 – 46.19	± 0.42
46.2 – 47.49	± 0.43
47.5 – 48.69	± 0.44
48.7 – 49.99	± 0.45
50.0 – 51.49	± 0.46
51.5 – 52.99	± 0.47
53.0 – 54.49	± 0.48
54.5 – 55.99	± 0.50

內徑範圍(ID)	公差(±)
56.0 – 57.99	± 0.51
58.0 – 59.99	± 0.52
60.0 – 61.49	± 0.54
61.5 – 62.99	± 0.55
63.0 – 64.99	± 0.58
65.0 – 68.99	± 0.58
67.0 – 68.99	± 0.59
69.0 – 70.99	± 0.61
71.0 – 72.99	± 0.63
73.0 – 74.99	± 0.64
75.0 – 77.49	± 0.66
77.5 – 79.99	± 0.67
80.0 – 82.49	± 0.69
82.5 – 84.99	± 0.71
85.0 – 87.49	± 0.73
87.5 – 89.99	± 0.75
90.0 – 92.49	± 0.77
92.5 – 94.99	± 0.79
95.0 – 97.49	± 0.81
97.5 – 99.99	± 0.83
100.0 – 102.9	± 0.84
103.0 – 105.9	± 0.87
106.0 – 108.9	± 0.89
109.0 – 111.9	± 0.91
112.0 – 114.9	± 0.93
115.0 – 117.9	± 0.95
118.0 – 121.9	± 0.97
122.0 – 124.9	± 1.00
125 – 127.9	± 1.03
128 – 131.9	± 1.05
132 – 135.9	± 1.08
136 – 139.9	± 1.10
140 – 144.9	± 1.13
145 – 149.9	± 1.17
150 – 154.9	± 1.20

內徑範圍(ID)	公差(±)
155 – 159.9	± 1.24
160 – 164.9	± 1.27
165 – 169.9	± 1.31
170 – 174.9	± 1.34
175 – 179.9	± 1.38
180 – 184.9	± 1.41
185 – 189.9	± 1.44
190 – 194.9	± 1.48
195 – 199.9	± 1.51
200 – 205.9	± 1.55
206 – 211.9	± 1.59
212 – 217.9	± 1.63
218 – 223.9	± 1.67
224 – 229.9	± 1.71
230 – 235.9	± 1.75
236 – 242.9	± 1.79
243 – 249.9	± 1.83
250 – 257.9	± 1.88
258 – 264.9	± 1.93
265 – 271.9	± 1.98
272 – 279.9	± 2.02
280 – 289.9	± 2.08
290 – 299.9	± 2.14
300 – 306.9	± 2.21
307 – 314.9	± 2.25
315 – 324.9	± 2.30
325 – 334.9	± 2.37
335 – 344.9	± 2.43
345 – 354.9	± 2.49
355 – 364.9	± 2.56
365 – 374.9	± 2.62
375 – 386.9	± 2.68
387 – 399.9	± 2.78
400 – 411.9	± 2.84
412 – 424.9	± 2.91

內徑範圍(ID)	公差(±)
425 – 436.9	± 2.99
437 – 449.9	± 3.07
450 – 461.9	± 3.15
462 – 474.9	± 3.22
475 – 486.9	± 3.30
487 – 499.9	± 3.37
500 – 514.9	± 3.45
515 – 529.9	± 3.54
530 – 544.9	± 3.63
545 – 559.9	± 3.72
560 – 579.9	± 3.81
580 – 599.9	± 3.93
600 – 614.9	± 4.05
615 – 629.9	± 4.13
630 – 649.9	± 4.22
650 – 669.9	± 4.34
670 – 689.9	± 4.46
≥ 690	± 0.65%

線徑範圍(CS)	公差(±)
≤ 2.62	± 0.08
2.63 – 3.00	± 0.09
3.01 – 4.50	± 0.10
4.51 – 5.50	± 0.13
5.51 – 7.50	± 0.15
7.51 – 8.50	± 0.18
8.51 – 10.0	± 0.20
≤ 2.62	± 0.08