


X-RING 公差表

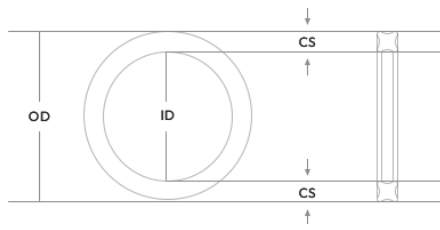

YANG SHIN

單位 unit:mm

依據:DIN3771 德國規範

內徑範圍(ID)	公差(±)
1.80-2.50	± 0.13
2.51-4.50	± 0.14
4.51-6.30	± 0.15
6.31-8.50	± 0.16
8.51-10.00	± 0.17
10.01-11.20	± 0.18
11.21-14.00	± 0.19
14.01-16.00	± 0.20
16.01-18.00	± 0.21
18.01-20.00	± 0.22
20.01-21.20	± 0.23
21.21-23.60	± 0.24
23.61-25.00	± 0.25
25.01-26.50	± 0.26
26.51-28.00	± 0.28
28.01-30.00	± 0.29
30.01-31.50	± 0.31
31.51-33.50	± 0.32
33.51-34.50	± 0.33
34.51-35.50	± 0.34
35.51-36.50	± 0.35
36.51-37.50	± 0.36
37.51-38.70	± 0.37
38.71-40.00	± 0.38
40.01-41.20	± 0.39
41.21-42.50	± 0.40
42.51-43.70	± 0.41
43.71-45.00	± 0.42
45.01-46.20	± 0.43
46.21-47.50	± 0.44
47.51-48.70	± 0.45
48.71-50.00	± 0.46
50.01-51.5	± 0.47
51.51-53.0	± 0.48
53.01-54.5	± 0.50
54.51-56.0	± 0.51

內徑範圍(ID)	公差(±)
56.01-58.0	± 0.52
58.01-60.0	± 0.54
60.01-61.5	± 0.55
61.51-63.0	± 0.56
63.01-65.0	± 0.58
65.01-67.0	± 0.59
67.01-69.0	± 0.61
69.01-71.0	± 0.63
71.01-73.0	± 0.64
73.01-75.0	± 0.66
75.01-77.5	± 0.67
77.51-80.0	± 0.69
80.01-82.5	± 0.71
82.51-85.0	± 0.73
85.01-87.5	± 0.75
87.51-90.0	± 0.77
90.01-92.5	± 0.79
92.51-95.0	± 0.81
95.01-97.5	± 0.83
97.51-100	± 0.84
100.01-103	± 0.87
103.01-106	± 0.89
106.01-109	± 0.91
109.01-112	± 0.93
112.01-115	± 0.95
115.01-118	± 0.97
118.01-122	± 1.00
122.01-125	± 1.03
125.01-128	± 1.05
128.01-132	± 1.08
132.01-136	± 1.10
136.01-140	± 1.13
140.01-145	± 1.17
145.01-150	± 1.20
150.01-155	± 1.24
155.01-160	± 1.27

內徑範圍(ID)	公差(±)
160.01-165	± 1.31
165.01-170	± 1.34
170.01-175	± 1.38
175.01-180	± 1.41
180.01-185	± 1.44
185.01-190	± 1.48
190.01-195	± 1.51
195.01-200	± 1.55
200.01-206	± 1.59
206.01-212	± 1.63
212.01-218	± 1.67
218.01-224	± 1.71
224.01-230	± 1.75
230.01-236	± 1.79
236.01-243	± 1.83
243.01-250	± 1.88
250.01-258	± 1.93
258.01-265	± 1.98
265.01-272	± 2.02
272.01-280	± 2.08
280.01-290	± 2.14
290.01-300	± 2.21
300.01-307	± 2.25
307.01-315	± 2.30
315.01-325	± 2.37
325.01-335	± 2.43
335.01-345	± 2.49
345.01-355	± 2.56
355.01-365	± 2.62
365.01-375	± 2.68
375.01-387	± 2.76
387.01-400	± 2.84
400.01-412	± 2.91
412.01-425	± 2.99
425.01-437	± 3.07
437.01-450	± 3.15

內徑範圍(ID)	公差(±)
450.01-462	± 3.22
462.01-475	± 3.30
475.01-487	± 3.37
487.01-500	± 3.45
500.01-515	± 3.54
515.01-530	± 3.63
530.01-545	± 3.72
545.01-560	± 3.81
560.01-580	± 3.93
580.01-600	± 4.05
600.01-615	± 4.13
615.01-630	± 4.22
630.01-650	± 4.34
650.01-670	± 4.46

線徑範圍(CS)	公差(±)
≤1.80	± 0.08
1.81-2.65	± 0.09
2.66-3.55	± 0.10
3.56-5.30	± 0.13
5.31-7.00	± 0.15
7.01-8.00	± 0.18
8.01-10.00	± 0.21
10.01-12.00	± 0.25